


Installation Guide

Utility Bin for GCX Channel - 16 x 11 x 4.75" / 40.6 x 28 x 12cm

Purpose:

Describe the installation of Utility Bin for GCX Channel

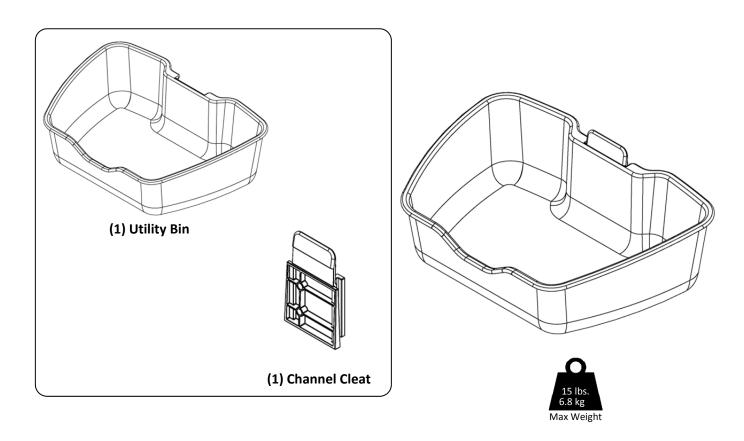



Tools Required:


• 1/8" Hex Wrench (included)


Installation note:


- 1. See A steps for installation.
- 2. See B steps for removal of bin from cleat.

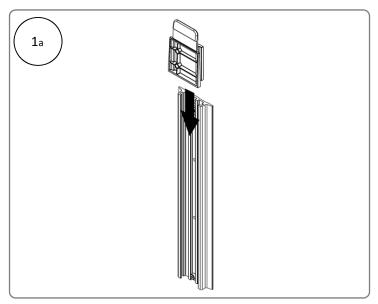


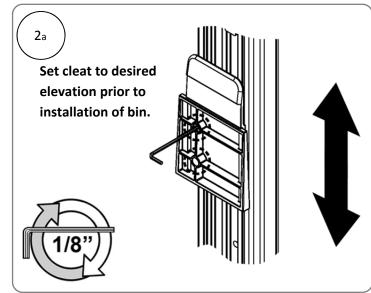

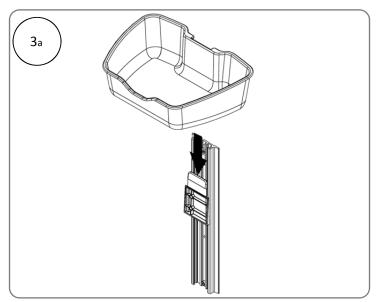

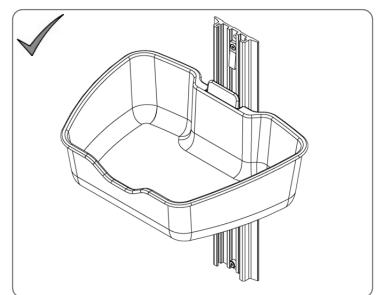

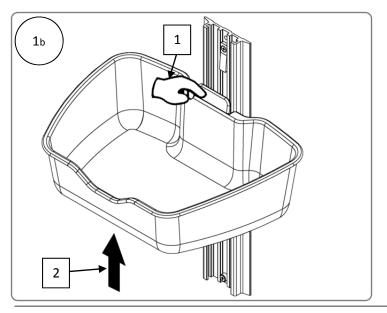

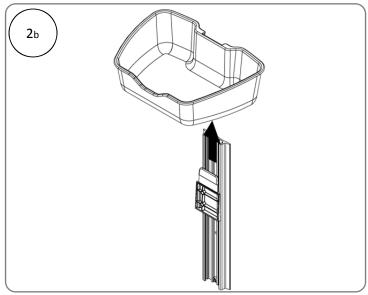

DU-WM-0001-27 Rev A 06/10/15 Page 2 of 3







Routine Maintenance

Periodically inspect all fasteners associated with the mounting assembly. Tighten or Adjust as necessary for optimal operation and safety.

Cleaning the Mounting Assembly

- 1. The mounting assembly may be cleaned with most mild, non-abrasive solutions commonly used in the hospital environment (e.g. diluted bleach, ammonia, or alcohol solutions).
- 2. The surface finish will be permanently damaged by strong chemicals and solvents such as acetone or trichloroethylene.
- 3. Steel wool or other abrasive material should never be used.
- 4. Damaged caused by the use of unapproved substances or processes will not be warranted. We recommend testing of any cleaning solution on a small area of the mounting assembly that is not visible to verify compatibility.
- 5. Never submerge or allow liquids to enter the mounting assembly. Wipe any cleaning agents off the mounting assembly immediately using a water-dampened cloth. Dry the assembly thoroughly after cleaning.

CAUTION: GCX makes no claims regarding the efficacy of the listed chemicals or processes as a means for controlling infection. Consult your hospital's infection control officer or epidemiologist. To clean or sterilize mounted devices or accessory equipment, refer to the specific instructions delivered with those products.